




Whatsapp: +8615800956935

Email: susana@shmmachinery.com

Website: www.mrcrushermill.com

Online Shop: shmmachinery.en.made-in-china.com

Address: No. 9875, Hunan Road, Nanhui Industrial Park,
Huinan Town, Pudong New Area, Shanghai

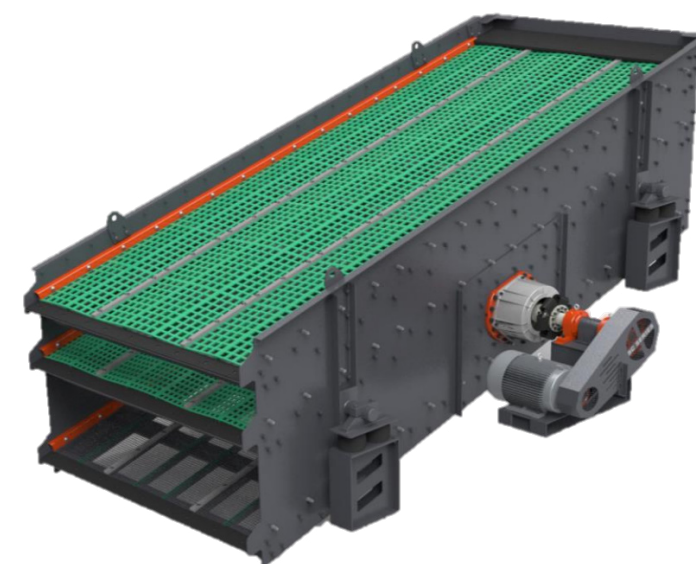

S5X Vibrating Screen

SHANGHAI MOUNTAIN RIVER MACHINERY CO.,LTD


CRUSH THE STONES CONSTRUCT THE WORLD

Introduction

S5X vibrating screen is a kind of incline circular screen which adopts the most advanced designing theory in the world. It is applicable for heavy duty, medium duty, and fine screening process. It is suitable for screening the material from primary crushing and secondary crushing, and final product. S5X vibrating screen is widely used in aggregates production, metallurgy mining, coal, chemical, recycling industries.

Main Features

- The high G-Force is 3.2-4.2g. The speed is 800 ~900 rpm and the amplitude 7~12 mm. The material on the screen deck can be activated, moving and rolling faster, to increase the capacity and separation efficiency.
- SV super vibrator is efficient, reliable and convenient.
- Not easy to crack, no welding point.
- The supporting device of screen uses a more expensive rubber spring, which has the advantages of longer service life, corrosion resistance, smooth operation, low noise, and less impact on the foundation than the metal spring.

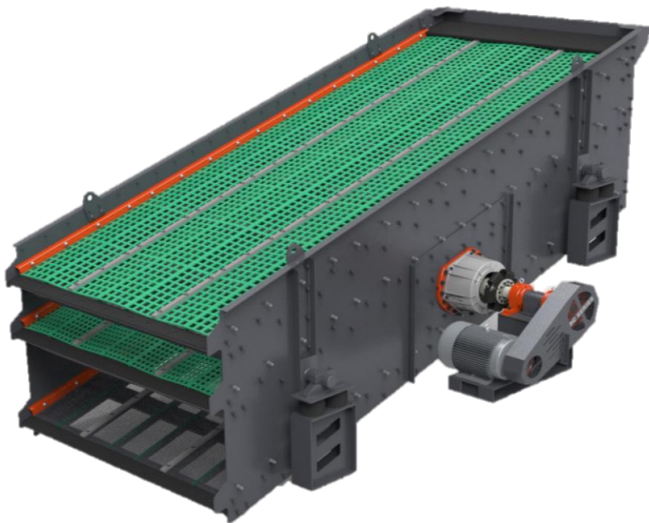

Technical Parameters

Model	Size W*L (mm)	Decks	Slope°	Speed (rpm)	Power (kw)	Capacity (t/h)	Mesh Size (mm)
S5X1845-2	1800*4500	2	18(18-25)	800 ~ 900	15	60-450	2-70
S5X1845-3		3	18(18-25)	800 ~ 900	22	60-450	2-70
S5X1860-2	1800 × 6000	2	18(18-25)	800 ~ 900	15	75-600	2-70
S5X1860-3		3	18(18-25)	800 ~ 900	30	75-600	2-70
S5X1860-4		4	18(18-25)	800 ~ 900	37	75-600	2-70
S5X2160-2	2100 × 6000	2	18(18-25)	800 ~ 900	22	85-700	2-70
S5X2160-3		3	18(18-25)	800 ~ 900	30	85-700	2-70
S5X2160-4		4	18(18-25)	800 ~ 900	37	85-700	2-70
S5X2460-2	2400 × 6000	2	18(18-25)	800 ~ 900	22	100-800	2-70
S5X2460-3		3	18(18-25)	800 ~ 900	30	100-800	2-70
S5X2460-4		4	18(18-25)	800 ~ 900	37	100-800	2-70
S5X2760-2	2700 × 6000	2	18(18-25)	800 ~ 900	30	120-900	2-70
S5X2760-3		3	18(18-25)	800 ~ 900	37	120-900	2-70
S5X3072-2	3000 × 7200	2	20(20-25)	800 ~ 900	37	150-1200	2-70

