




WhatsApp: +86 13524175811

Website: www.mrcrushermill.com

Email: susana@shmmachinery.com

No. 9875, Hunan Road, Nanhui Industrial Park,
Huinan Town, Pudong New Area, Shanghai

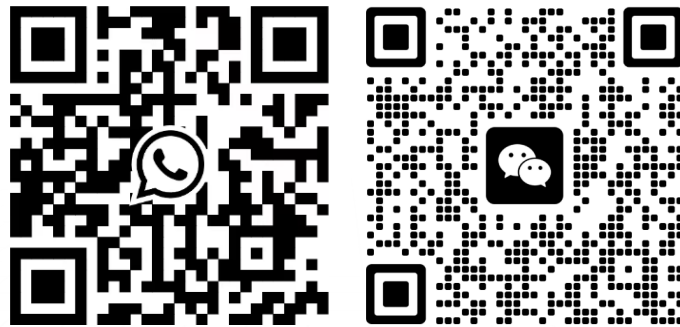

YA Vibrating Screen

SHANGHAI MOUNTAIN RIVER MACHINERY CO.,LTD

CRUSH THE STONES, CONSTRUCT THE WORLD


YA Vibrating Screen

Introduction

YA vibrating screen adopts a high-speed eccentric wheel to drive the whole eccentric shaft as the source of the vibration exciter. It is used for classification of various stone materials, thus to effectively improve the production efficiency of the production line.

Main Features

- High screening efficiency. It adopts a high-speed eccentric wheel to drive the whole eccentric shaft as the source of the vibration exciter to achieve a stable vibration source and a strong vibration force.
- Stable work. The equipment features smooth vibration and low noise by virtue of its structure design optimization, the high-speed bearings of an international well-known brand are configured, so that the equipment stability can be further improved.
- Simple structure and convenient maintenance.

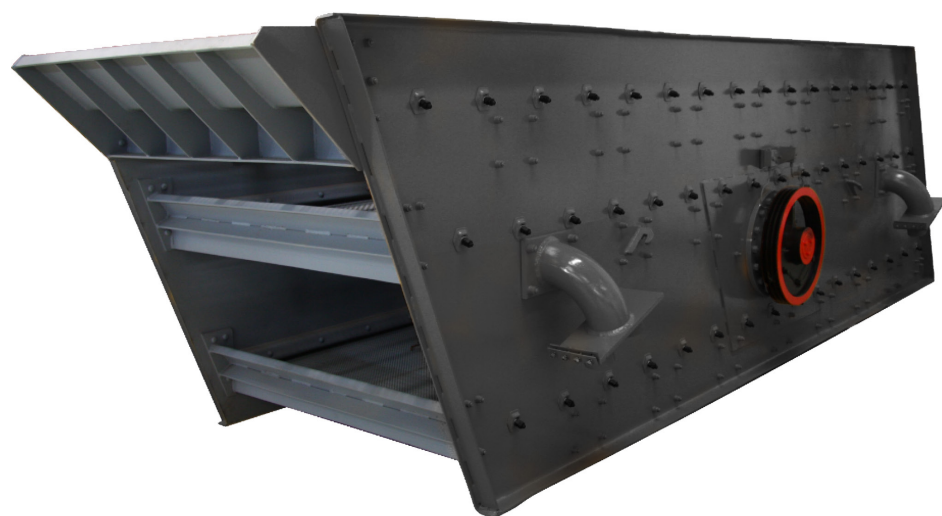

Technical Parameters

Model	Layers	Spec. of Screen (mm)	Max. Feed Size (mm)	Capacity (t/h)	Vibrating Frequency (Hz)	Power (kW)	Overall Dimension (mm)
2YA1237	2	1200*3700	200	7.5-80	800-970	15	4642*2250*2659
3YA1237	3	1200*3700	200	7.5-80	800-970	15	4898*2250*3133
2YA1548	2	1500*4800	400	50-208	970	15	5802*2585*3053
3YA1548	3	1500*4800	400	50-250	970	15	6046*2585*3537
2YA1848	2	1800*4800	400	50-260	970	18.5	5802*2947*3053
3YA1848	3	1800*4800	400	50-300	970	18.5	6046*2947*3538
2YA1860	2	1800*6000	400	50-300	970	18.5	7011*2947*3471
3YA1860	3	1800*6000	400	50-350	970	22	7243*2987*3955
4YA1860	4	1800*6000	400	50-350	970	22	7498*2987*4439
2YA2160	2	2100*6000	400	100-500	730	22	7076*3402*3666
3YA2160	3	2100*6000	400	100-500	730	30	7284*3467*4092
4YA2160	4	2100*6000	400	100-500	730	30	7551*3467*4582
2YA2460	2	2400*6000	400	150-700	730	37	7046*3770*3603
3YA2460	3	2400*6000	400	150-700	730	37	7289*3782*4092

